


Flowshield SL (2 mm)

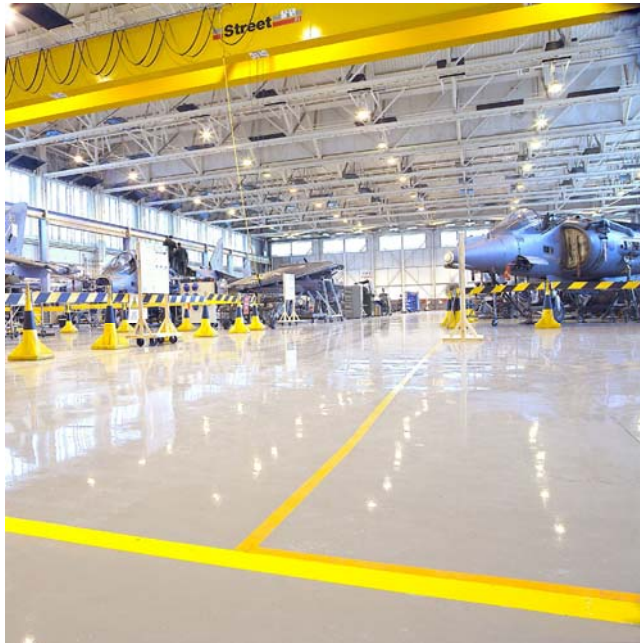

Description

Hygienic self smoothing resin floor finish.

Uses

Dry process areas where the floor is subjected to medium to heavy duty foot, trolley, pallet truck and rubber wheeled fork lift traffic. Typical uses include laboratories, clean rooms, warehouses, and electronic, aerospace, automotive and printing plants.

Benefits

- Attractive, enhances working environment
- Hygienic – easy to clean
- Non-tainting, non-dusting
- Hard wearing floor finish
- Abrasion resistant
- Anti-static grade available

Project References

Automotive :- Vauxhall; Jaguar; Bentley.

Aerospace :- Airbus.

Electronic :- Ericsson; NOKIA.

Pharmaceutical :- Innovative Technologies; Astra Zeneca; GlaxoSmithKline.

Standard colour chart



Goosewing Grey 222



Beige 326



Mid Grey 280



Emerald Green 740



Yellow Grey 217



Yellow 340




Tile Red 637



Sky Blue 452

The applied colours may differ slightly from the examples shown above. Contact our customer services for a true colour sample or a special colour match.

System Design

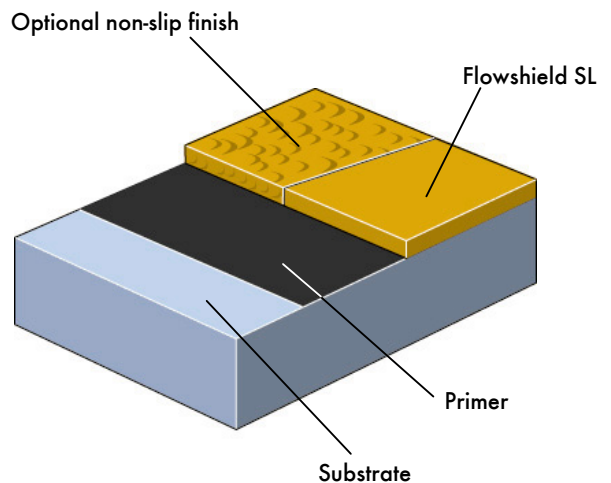

Model Specification

Product: Flowshield SL

Finish: Gloss

Thickness: 2 mm

Colour: _____

Preparatory work and application in accordance with suppliers instructions.

Supplier: Flowcrete UK Ltd.

Telephone : Customer Service - +44 (0) 1270753000

Installation Service

The installation should be carried out by a Flowcrete approved contractor with a documented quality assurance scheme.

Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site

www.flowcrete.com

Products Included in this System

Primer: Flowprime @ 0.25 kg/m²

(Porous substrates may require 2 coats)

Topping: Flowshield SL @ 3.6 kg/m²

For optional sealers and slip resistant dressings please consult our Technical Advisors.

Detailed application instructions are available upon request.

Focus on the Floorzone

Flowcrete Group plc are world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing, tank lining systems... to name just a few. Our objective is to satisfy your Floorzone needs.

Flooring Design Service

Special corporate colours and designs can be produced to special order.

Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm², free from laitance, dust and other contamination. The substrate should be dry to 75% RH as per BS 8204 and free from rising damp and ground water pressure. If no damp proof membrane is present Hydraseal DPM can be incorporated directly beneath the Flowshield SL system.

Environmental considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

System Performance Guide

Complies with BS 8204-6/FeRFA category 5.

The table below shows how well the system complies with different characteristics.

A scale of 1 - 5 where 5 is the best value.

5 Excellent, 4 Very Good, 3 Good (Pass), 2 Fair, 1 Poor

| | | | |
|-----------------------|---|---------------------|---|
| Fire Safety | 4 | Impermeability | 5 |
| Slip Resistance - dry | 5 | Cleanability | 5 |
| - wet | 1 | | |
| Impact Resistance | 5 | Wear Resistance | 4 |
| Thermal Resistance | 3 | Chemical Resistance | 3 |
| Heavy Traffic | 5 | Scratch Resistance | 3 |

Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

| | |
|-----------------------------|--|
| Fire Resistance | BS 476:Part 7: Surface spread of flame - Class 2 (indicative) |
| Slip Resistance Value (SRV) | Method described in BS 7976-2 Dry 67 Wet 26 (typical values for 4-S rubber slider) |
| Abrasion Resistance | BS 8204-2 Class AR2 - Medium duty industrial and commercial. |
| Temperature Resistance | Tolerant of sustained temperatures up to 50°C |
| Water Permeability | Nil - Karsten test (impermeable) |
| Chemical Resistance | Go to www.flowcrete.com |
| Compressive Strength | 55 N/mm ² (BS 6319) |
| Flexural Strength | 35 N/mm ² (BS 6319) |
| Tensile Strength | 25 N/mm ² (BS 6319) |
| Bond Strength | Greater than cohesive strength of 25N/mm ² concrete. >1.5 MPa. |
| Toxicity (when cured) | Taint free to sensitive foodstuffs. |

Speed of Cure

| | 10°C | 20°C | 30°C |
|--------------------|---------|--------|--------|
| Light traffic | 24 hrs | 12 hrs | 6 hrs |
| Full traffic | 72 hrs | 48 hrs | 24 hrs |
| Full chemical cure | 12 days | 7 days | 7 days |

Life Expectancy

6 - 8 years, dependant on thickness and subject to correct maintenance regime.

Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.

Flowcrete Group plc
Booth Lane, Moston, Sandbach,
Cheshire CW11 3QF
UK
Tel: +44 (0)1270 753000
Fax: +44 (0)1270 753333
Email: uk@flowcrete.com

Flowcrete Europe Ltd
Booth Lane Moston Sandbach
Cheshire CW11 3QF
UK
Tel: +44 (0)1270 753000
Fax: +44 (0)1270 753333
Email: uk@flowcrete.com

Flowcrete Asia Sdn Bhd
Lot 37631 & 37632 Jalan 6/37A
Taman Bukit Maluri
Industrial Area Kepong,
52100 Kuala Lumpur, Malaysia
Tel: +60 3 6277 9575
Fax: +60 3 6277 4645
Email: malaysia@flowcrete.com

Flowcrete North America, Inc.
11133 I-45 South
Suite J, Conroe
Texas 77302
U.S.A.
Tel: +1 936 539 6700
Fax: +1 936 539 6701
Email: usa@flowcrete.com

Flowcrete
for the world at your feet