


# Sika® Latex Self Levelling Compound For Interior Floor Levelling

## Description

Sika® Latex Self Levelling is a ready to use latex modified cement based self leveller for floor smoothing and preparation of uneven internal floors prior to the laying of floor coverings.

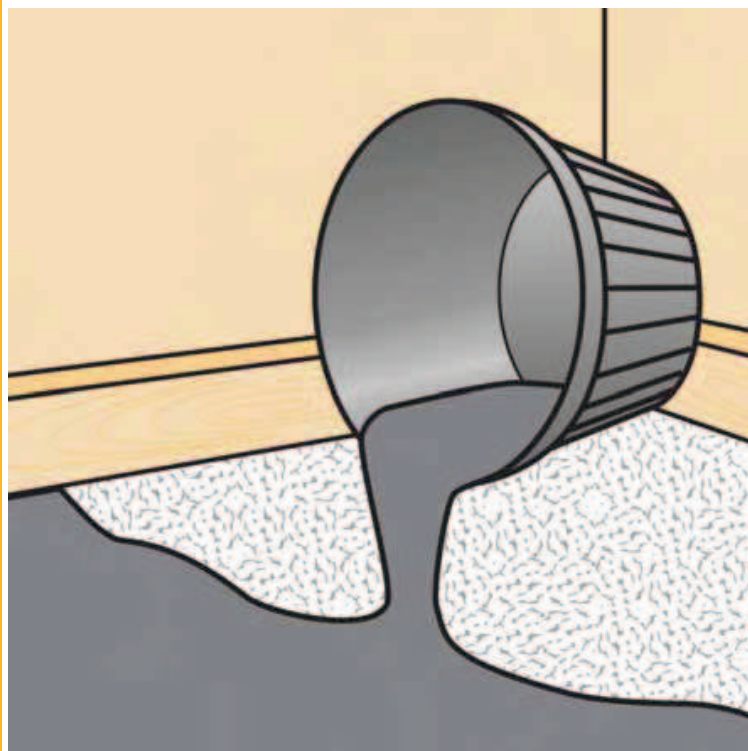

## Typical Uses

- Floor smoothing.
- Internal levelling prior to laying of floor coverings.
- Higher bond strengths.
- Slight flexibility for difficult substrates.

## Advantages

- Self smoothing fluid.
- Hand applied.
- Levels and renovates old floors.
- Rapid drying.

## Application

Fill holes/depressions with a **Sika®** repair mortar. Surfaces must be dry, clean, sound and free from dust and any contamination. Prime porous surfaces with 1-2 coats of **SikaBond® PVA** (1 part PVA:4 parts clean water). Allow to dry. Fully mix **Sika® Latex Levelling Compound** using a slow speed mixer and paddle (25kg powder requires 5 litres of water). Pour the mixed product onto the floor and spread evenly with a steel trowel to form a thin, tight scrape coat (max. 6mm down to featheredge). Coverage is 2kg/m<sup>2</sup> per mm thickness. For a thicker covering (up to 25mm), add 1 part of clean, dry sharp sand to 1 part of **Sika® Latex Levelling Compound**. Light foot traffic - 2 to 4 hours; Floor overlaying - 18+ hours. For full details, limitations etc. refer to data sheet, product label or contact **Sika Limited**.


## Handling/Precautions



Irritant



Protect from moisture



Application limits



6 months

Product	Colour	Pack Size	Part No.
Sika® Latex Levelling Compound	Grey	25 kg	18LLC25