



Specialist Construction Supplies for Repair, Maintenance, Building & Infrastructure

Pozament General Purpose Construction Grout Data Sheet

Specification notes

Product: **Pozament General Purpose Construction Grout**

Supplier:

Arcon Construction Supplies
19-20 Prestwood Court
Leacroft Road
Warrington
WA3 6SB

Tel: **01925 852225**

Email: mail@arconsupplies.co.uk

Web: www.arconsupplies.co.uk

Call 01925852225 or visit [Arcon Construction Supplies](http://www.arconconstruction.com) website

...for technical, specification & application advice;

or

...for more information on our other repair, maintenance,
engineering and construction specialist products.

[Industrial Flooring](#) | [Concrete Repairs](#) | [Protective and Waterproof Coatings](#)

[Jointing and Paving Mortars](#) | [Anti-slip Floor Paints](#) | [Non-shrink Grouts & Mortars](#)

Pozament General Purpose Construction Grout Data Sheet

TECHNICAL INFORMATION

GENERAL PURPOSE CONSTRUCTION GROUT (CG)

Product Data Sheet: Construction and Installation Grouts

DESCRIPTION

(D.o.T. Highways Spec: - 2601 Compliant)

Pozament General Purpose Construction Grout (previously Cemrok Easi-Flow CG) is a non-shrink, high strength cementitious grout comprising of low alkali high specific area Portland cements and other cementitious binders combined with high purity aggregates and a system of compatible admixtures to achieve high in service performance.

This grout has high flow characteristics to achieve penetration and levelling with no bleed and zero shrinkage when placed at 0.22 water solid ratio.

USES

Pozament General Purpose Construction Grout has been specifically designed for anchor or base plate grouting, under machinery and stanchion plates, grouting rails and bridge bearings, fixing bolts, parapet rails etc. It can also be used in its plastic state as a bedding mortar.

KEY PROPERTIES

- Equivalent Sodium Oxide is less than 3.0kg/m³.
- High ultimate strength.
- Non-shrink.
- Can be used for grouting sections up to 100mm thick.
- Chloride free.
- High fluidity – can be pumped or poured.
- Complies with U.S. Corps of Engineers Specification CRD-C 621.
- High yield 25kg bag.

TYPICAL PERFORMANCE

Compressive Strength (N/mm ²)	
1 day	13-15
3 day	33-35
7 day	38-40
28 day	50
Flexural Strength (N/mm ²)	
1 day	3-3.5
3 day	5-5.5
7 day	5.75-6.25
28 day	6.75-7.25
Setting Times (Minutes)	
Initial	240
Final	360
Expansion Results (%)	
1 day	0.003%
7 day	0.003%
Water/Solid ratio	0.22
Pot Life	Approximately 45 mins (Can vary with temperature)

Data is sourced from tests performed in controlled laboratory conditions at 20°C.

YIELD

The approximate yield of mixed grout per tonne of dry powder is 0.61m³. The approximate quantity of dry powder required to produce 1m³ of set grout is 1.64 tonnes. This equates to 15.2 litres per 25kg of dry powder. These figures do not allow for site wastage.

MIXING INSTRUCTIONS

The information given in this technical data sheet is based on our current knowledge and is intended to provide general notes on our products and their uses. Tarmac endeavour to ensure that the information given is accurate, but accept no liability for its use or its suitability for particular application because of the product being used by the third party without our supervision. Any existing intellectual property right must be observed.

For more details contact:
 03444 630 046 pozament@tarmacbp.co.uk

The grout should be mixed using water that complies with BS EN 1008 (as for concrete). It should be mixed in a suitable container using either an electric (1kW) or pneumatic power tool. Larger amounts can be mixed in a forced action paddle mixer.

20kg of the grout powder should be added carefully to 4.4 litres of water, progressively mixing until a fluid grout consistency is achieved.

Small quantities can be mixed by hand, care being taken to accurately measure the water.

Once mixed, the material must not be reworked.

APPLICATION AND PLACING

Pozament General Purpose Construction Grout can either be poured or pumped into position. Due to the relatively short pot life pumped operations must be executed quickly particularly in warm weather conditions.

For best results the grout should be placed immediately on completion of mixing. Ensure all surfaces with which the grout will come into contact are clean and dust free. Ideally, concrete substrates should be thoroughly soaked for several hours prior to the grout being applied to reduce suction.

Permeable concrete should be treated with a suitable concrete primer such as **Acrylic Primer**. Shuttters must be impermeable to the passage of water and both strong enough and sufficiently supported to contain the placed grout. When gravity placed, sufficient hydrostatic head must be given and grout volume maintained to enable the material to flow completely through the void to be filled from one side of shutter only. A minimum 50mm head is recommended. Immediately prior to placement all excess water should be removed. Any grout exposed to wind or drying conditions should be suitably protected, preferably by coating with a wax-free Curing Agent.

Any grout that is likely to be subject to low temperature immediately after placing or during its early strength development should be protected by covering with hessian or other insulative material. For concreting in cold weather reference should be made to BS8110 Pt. 1 Section 6.


Shutter detail for pouring **Pozament**

For more details contact:

03444 630 046 pozament@tarmacbp.co.uk

POZAMENT.CO.UK

General Purpose Construction Grout

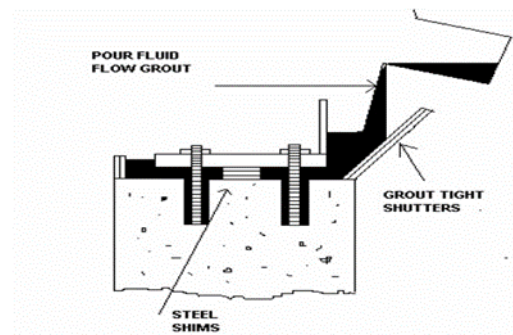

Grout should be chamfered to ensure that unrestrained shrinkage cracking does not occur.

QUALITY CONTROL

All Pozament products are factory blended, tested and packaged to quality control procedures in accordance with BS EN ISO 9001.

CLEAN UP AND SPILAGES

Dry powders should be swept up and disposed of in accordance with the Local Authority.

PACKAGING AND STORAGE

Pozament General Purpose Construction Grout is available in nominal 20kg sacks, palletised and shrink wrapped.

Pozament General Purpose Construction Grout may also be available in Intermediate Bulk Containers or in Bulk Powder Tankers.

Palletised **Pozament General Purpose Construction Grout** should be stored in cool dry areas clear of the ground, sheeted or under cover and stacked not more than two pallets high. The product should be used on a first in – first out basis.

Shelf life is 6 months in paper bags and 12 months in plastic bags (from the date shown on the bag). Subject to correct storage conditions.

HEALTH & SAFETY

Health and safety advice, which must be followed, can be found on the product label. The information given in this technical data sheet is based on our current knowledge and is intended to provide general notes on our products and their uses. Tarmac endeavours to ensure that the information given is accurate, but accepts no liability for its use or its suitability for particular application because of the product being used by the third party without our supervision. Any existing intellectual property right must be observed.

be found on the Material Safety Data Sheet. Users are advised to wear face mask, goggles, gloves and overalls when handling, mixing and applying cementitious products.

Contains Portland Cement Contains Chromium (VI), which may produce an allergic reaction. Clothing contaminated by wet cement should be removed immediately and washed before reuse. R38 - Irritating to skin. R41 - Risk to serious damage to eyes. S26 - In case of contact with eyes, rinse immediately with water and seek medical advice. S37/39 - Wear suitable gloves and eye/face protection. S2 - Keep out of reach of children.

INFORMATION, PRICES & ORDERING

For technical information, pricing and to place orders contact our Sales Office on the following:

Telephone: 03444 630 046

Email: pozament@tarmacbp.co.uk

Visit our website: Pozament.co.uk

Tarmac Building Products Ltd.
Swains Park Industrial Estate, Park Road, Overseal,
Swadlincote, Derbyshire, DE12 6JT

**For more details contact:
03444 630 046 pozament@tarmacbp.co.uk**

The information given in this technical data sheet is based on our current knowledge and is intended to provide general notes on our products and their uses. Tarmac endeavour to ensure that the information given is accurate, but accept no liability for its use or its suitability for particular application because of the product being used by the third party without our supervision. Any existing intellectual property right must be observed.