



Specialist Construction Supplies for Repair, Maintenance, Building & Infrastructure

## Resupatch Data Sheet

Specification notes

Product: **Resupatch**

Supplier:

**Arcon Construction Supplies**  
**19-20 Prestwood Court**  
**Leacroft Road**  
**Warrington**  
**WA3 6SB**

Tel: **01925 852225**

Email: [mail@arconsupplies.co.uk](mailto:mail@arconsupplies.co.uk)

Web: [www.arconsupplies.co.uk](http://www.arconsupplies.co.uk)

Call 01925852225 or visit [Arcon Construction Supplies](http://www.arconsupplies.co.uk) website

...for technical, specification & application advice;

or


...for more information on our other repair, maintenance,  
engineering and construction specialist products.

[Industrial Flooring](#) | [Concrete Repairs](#) | [Protective and Waterproof Coatings](#)

[Jointing and Paving Mortars](#) | [Anti-slip Floor Paints](#) | [Non-shrink Grouts &](#)

[Mortars](#)

**Resupatch Data Sheet**

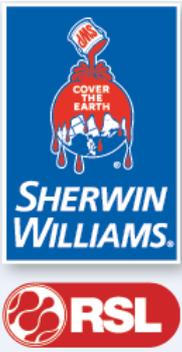

# Resupatch

Revised 12/2017—Issue 1: REF : PAST 2016 06

## DESCRIPTION

Resupatch is a two-pack easy to use epoxy resin mortar, with excellent mechanical properties. This makes it ideal for rapid repair of concrete surfaces in heavy duty environments.

## ADVANTAGES

- Hard wearing durable repairs for Industrial Use
- Ease of application
- Minimum surface preparation
- Can be feather edged
- Excellent abrasion and impact resistance
- Concrete like in appearance
- Dust-free

## RECOMMENDED USES

- Any sound concrete requiring repairs
- Warehouse areas
- Chemical production and storage
- Printing and packaging areas
- Engineering facilities
- Automotive industry
- Aerospace production areas
- Industrial workshops

## PRODUCT INFORMATION

System thickness (DFT)	Dependent upon Requirement
Solids Content by weight	100%
Pack Sizes	5kg & 20kg
Pack make up	1 x Base 1 x Hardener 1 x Aggregate
Shelf Life	12 months (Base, Hardener & Aggregate)
Storage	Keep out of direct sunlight. Store in a dry place, not below 15°C

## DRYING TIMES & COVERAGE RATES at 20°C

Coverage rate (Theoretical)	5kg will cover 0.5m <sup>2</sup> at 5mm thickness (This is only a guide and coverage will depend on the type and size of repairs being carried out)
Pot life	30 Minutes
Recoating intervals	For Seal Coats, 12 - 16 Hours
Light traffic	24 hours
Full traffic	72 hours
Full chemical cure	Up to 7 days



## Specification

Product : Resupatch

Finish : Textured Grey Finish

Thickness : As required

Colour : Flint

## Products required for this system

Prime : Resuprime

System : Resupatch

Surface Seal : Any Sherwin-Williams / RSL resin floor system

## Preparation

**New concrete Floors:** Must be clean, sound, dry, fully cured and surface laitance removed by vacuum enclosed shot blasting, scarifying or mechanical grinding. Fats, oils or greases must be removed by mechanical means and detergent washing and make sure all residue detergent is washed and removed by rinsing with clean water.

**Existing Floors (previously coated):** All previous coatings and loose floor paints must be removed by mechanical preparation as described in the above section and primed as specified. If the old resin flooring cannot be removed, then please consult with our technical team for advice on intercoat adhesion and suitability as it may not be compatible with existing floor coating.

Where overcoating other systems such as epoxy coatings or screeds, as part of a specified composite system in the data sheets, please follow the recoat time as stated in the individual data sheets, the coating in each stage should be tack free, but not fully cured. If fully cured then mechanical preparation is required to ensure intercoat adhesion.

## Priming

Open and porous substrates may require priming with Resuseal VF, also Resuprime NT may be used as primer on dry substrates only with less than 75% ERH reading. Where the Relative Humidity of a substrate exceeds 75% ERH RS Dampshield FH should be specified and selected on the basis of hygrometer readings in accordance with BS 8203.

The number of coats to be applied is chosen in accordance with the following table.

ERH % Required Coating Thickness

75-85 1 coat of R.S. Dampshield FH at 200 microns per coat

85-92 2 coats of R.S. Dampshield FH at 200 microns per coat

92-97 3 coats of R.S. Dampshield FH at 200 microns per coat

For further information please refer to recommended individual product data sheets.

## Application

The ambient temperatures of the areas should not be allowed to fall below 15°C throughout the application and the curing period, as this could have an adverse effect on the appearance and colour of the system. Surface temperature must be above 10°C. Where possible it is recommended that the application area is heated to a minimum temperature of 15°C ideally to allow the ambient and substrate temperature to stabilise prior to installation.

**Mixing:** Pre-mix the coloured base component to a uniform consistency then mix the entire contents of the base with the hardener. If a separate mixing bucket is being used mix thoroughly ensuring all contents of both components are removed from the buckets supplied. Add the aggregate component slowly whilst mixing. Mix using an electric mixer for approximately two to three minutes until the three components have fully combined. For larger units a forced action mixer may be required to fully combine the aggregate into the resins.

Resupatch should be worked with a trowel or float to achieve a dense, compacted finish. This is best achieved by the application of smooth even pressure in one direction, gradually increasing the pressure as the material compacts and beds down. Over-working the material will draw fines to the surface which may result in resin-rich spots and finish variations.

The surface should be protected from temperatures of less than 10°C and moisture in the early stages of cure.

**Resupatch** can be sealed using a variety of seal coats listed in the Sherwin-Williams / RSL range of products .

## Category Guide

FeRFA Category : 6

## Technical Information

The following figures are obtained from laboratory tests and our experience with this product .

Slip Resistance Dry > n/a  
Method BS7976 pt1-3 2002 Wet Please consult RSL

The slip resistance of a floor surface can vary as a result of the installation process, conditions at the time of application and subsequent traffic. Inappropriate cleaning or maintenance can adversely affect the performance. For further advice on potential wet areas please consult RSL.

Abrasion Resistance n/a  
Method BS8204 /ASTM D4060

Temperature Resistance Tolerant of sustained temperatures of up to 60°C

Chemical Resistance Good chemical resistance  
Consult RSL for Further details

VOC 48 g/l  
Calculation based on a full mixed unit

Life Expectancy 6 years plus  
Subjected to Industrial Traffic  
RSL terms and conditions will apply

	
<b>Resin Surfaces Ltd</b> Titan House, Lowick Close, Newby Road Industrial Estate Hazel Grove, Stockport. SK7 5ED 13	
<b>BSEN 13813 SR B 3.5 - AR 0.5 - IR&gt;4</b> Resin coating/screed for use inside buildings as per RSL data sheet	
Wear resistance:	AR 0.5
Bond strength:	B 3.5
Impact resistance:	IR > 4

## Maintenance and Cleaning

Sherwin-Williams recommend that **Resupatch** should be cleaned with a regular industrial cleaning regime with a floor scrubber utilising **R.S. Industrial Floor Cleaner** or similar with dirty water being removed. Isolated localised cleaning can be carried out using **R.S. Tyre Mark Remover**, **R.S. Fats and Grease Remover** & **R.S. Oil Remover**. All surfaces should be thoroughly rinsed with clean water after the use of chemical cleaners.

**Please refer to the RSL Guide to Cleaning of Resin Floors**

## Health and Safety

**Resupatch** is formulated from materials designed to achieve the highest level of performance as safely as possible. However, specific components require proper handling and suitable equipment, this information is given in the relevant safety data sheets. In all cases, spillages or skin contamination should be cleaned as soon as practically possible, by dry wiping of the affected area, and thorough washing with soap and water.

The information given in this data sheet is derived from tests and experience with the products and is believed to be reliable. The information is offered without guarantee to enable purchasers to determine for themselves the suitability of the product for their particular application. Any specification or advice given by Resin Surfaces Limited or its agents is based on the information supplied by the purchaser. Resin Surfaces Limited cannot be held accountable for errors or omissions as a result of that information being incorrect or incomplete. No undertakings can be given against infringement of patents. Some materials are derived from natural sources. As such some variation may occur. Site conditions may also contribute to variation in finish and colour.

Sherwin-Williams Protective & Marine  
Tower Works, Kestor Street, Bolton, BL2 2AL, United Kingdom  
Tel : + 44 (0) 1204 521771 F: + 44 (0) 1204 382115  
W : Sherwin-williams.com/protectiveEMEA1  
Registered in England : Reg. No. 893081  
Reg. Office Tower Works, Kestor Street, Bolton BL2 2AL England