



Specialist Construction Supplies for Repair, Maintenance, Building & Infrastructure

Sika Latex Self Levelling Data Sheet

Specification notes

Product: **Sika Latex Self Levelling**

Supplier:

Arcon Construction Supplies

19-20 Prestwood Court

Leacroft Road

Warrington

WA3 6SB

Tel: **01925 852225**

Email: mail@arconsupplies.co.uk

Web: www.arconsupplies.co.uk


Call **01925 852225** or visit [Arcon Construction Supplies](http://www.arconconstruction.com)
... for more information on our flooring and construction products

[Industrial Flooring](#) | [Concrete Repairs](#) | [Protective and Waterproof Coatings](#)
[Jointing and Paving Mortars](#) | [Anti-slip Floor Paints](#) | [Concrete Repair Mortars](#)

Sika® Latex Self Levelling Compound For Interior Floor Levelling

Description

Sika® Latex Self Levelling is a ready to use latex modified cement based self leveller for floor smoothing and preparation of uneven internal floors prior to the laying of floor coverings.

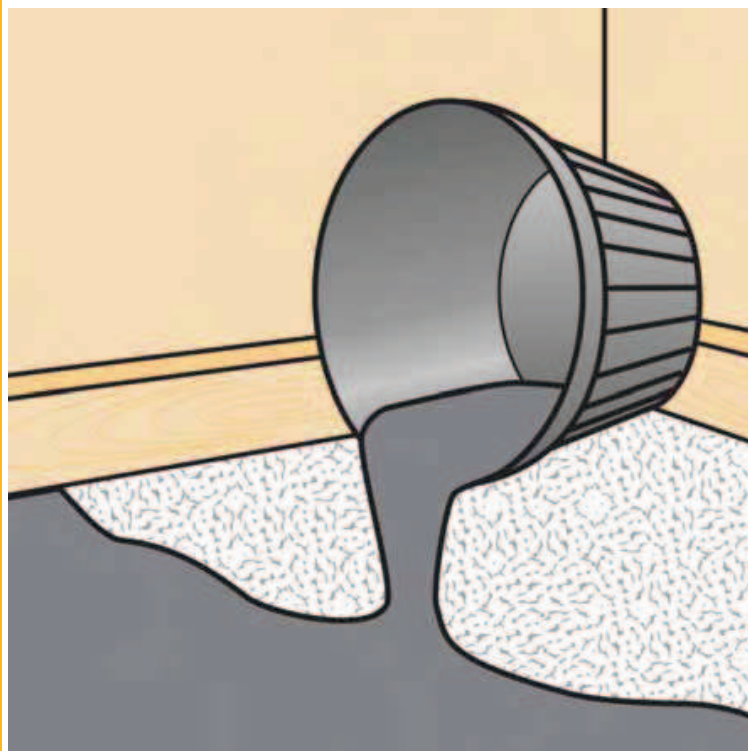

Typical Uses

- Floor smoothing.
- Internal levelling prior to laying of floor coverings.
- Higher bond strengths.
- Slight flexibility for difficult substrates.

Advantages

- Self smoothing fluid.
- Hand applied.
- Levels and renovates old floors.
- Rapid drying.

Application

Fill holes/depressions with a **Sika®** repair mortar. Surfaces must be dry, clean, sound and free from dust and any contamination. Prime porous surfaces with 1-2 coats of **SikaBond® PVA** (1 part PVA:4 parts clean water). Allow to dry. Fully mix **Sika® Latex Levelling Compound** using a slow speed mixer and paddle (25kg powder requires 5 litres of water). Pour the mixed product onto the floor and spread evenly with a steel trowel to form a thin, tight scrape coat (max. 6mm down to featheredge). Coverage is 2kg/m² per mm thickness. For a thicker covering (up to 25mm), add 1 part of clean, dry sharp sand to 1 part of **Sika® Latex Levelling Compound**. Light foot traffic - 2 to 4 hours; Floor overlaying - 18+ hours. For full details, limitations etc. refer to data sheet, product label or contact **Sika Limited**.


Handling/Precautions



Irritant



Protect from moisture



Application limits



6 months

Product	Colour	Pack Size	Part No.
Sika® Latex Levelling Compound	Grey	25 kg	18LLC25