



Specialist Construction Supplies for Repair, Maintenance, Building & Infrastructure

## Sikadur 33 Data Sheet

### Specification notes

Product: **Sikadur 33**

Supplier:

**Arcon Construction Supplies**  
**19-20 Prestwood Court**  
**Leacroft Road**  
**Warrington**  
**WA3 6SB**

Tel: **01925 852225**

Email: [mail@arconsupplies.co.uk](mailto:mail@arconsupplies.co.uk)

Web: [www.arconsupplies.co.uk](http://www.arconsupplies.co.uk)

Call 01925852225 or visit [Arcon Construction Supplies](http://www.arconconstruction.com) website

...for technical, specification & application advice;

or

...for more information on our other repair, maintenance,  
engineering and construction specialist products.

[Industrial Flooring](#) | [Concrete Repairs](#) | [Protective and Waterproof Coatings](#)

[Jointing and Paving Mortars](#) | [Anti-slip Floor Paints](#) | [Non-shrink Grouts & Mortars](#)

**Sikadur 33 Data Sheet**

## Sikadur®-33

### 2-part structural epoxy adhesive

---

#### Product Description

---

Thixotropic two part structural adhesive based on epoxy resin in a cartridge.

#### Uses

*As a structural adhesive for:*

- Concrete elements
- Hard natural stone
- Ceramics, fibre cement
- Mortar, Bricks, Blocks, Masonry, render etc.
- Steel, Iron, Aluminium
- Wood
- Polyester, Epoxy

*For concrete repairs*

Interior, vertical and overhead repair of:

- Corners and edges
- Hole and void filling
- Joint arrises

*Joint filling and crack sealing:*

- Crack filling and sealing (non-moving)

*Metalwork, carpentry:*

- Fixing and fastening of handrails, railings, balustrades and supports
- Fixing of window and door frames

*For use in the following:*

- Concrete
- Hard natural stone
- Solid rock
- Hollow and solid masonry
- Steel
- Wood

---

#### Characteristics / Advantages

- Can be used on damp concrete
  - Excellent adhesion to the substrate
  - Non-sag, also overhead
  - High load capacity
  - Shrinkage-free hardening
  - Styrene-free
- 

Construction



## Tests

**Approval / Standards**      Testing according to EN 1504-4.

## Product Data

### Form

**Colours**                      Part A:                      white  
   Part B:                      grey  
   Part A+B mixed:        grey

**Packaging**                      250 ml cartridge, 12 per box  
   Pallet: 60 boxes with 12 cartridges

### Storage

**Storage Conditions / Shelf-Life**      12 months from date of production if stored properly in undamaged and unopened, original, sealed packaging in cool and dry conditions, at temperatures between +10°C and +30°C. Protect from direct sunlight.  
   On each Sikadur®-33 cartridge the best before date is printed.

### Technical Data

**Chemical Base**                      Epoxy resin.

**Density**                              1.35 kg/l (part A+B mixed)

### Curing Speed

Temperature 	Open Time T <sub>gel</sub> 	Curing Time T <sub>cur</sub> 
+10°C	210 minutes	3 days*
+20°C	90 minutes	2 days*
+35°C	45 minutes	1 day*

\* to achieve approx. 80% of the performance  
Min. cartridge temperature +10°C

**Sag Flow**                              Non-sag, suitable for overhead application

**Layer Thickness**                      0.5 mm min. / 10 mm max.

**Change of Volume**                      Shrinkage:  
   Hardens without shrinkage.

**Thermal Expansion Coefficient**      Coefficient W:  
   9.3 x 10<sup>-5</sup> per °C (Temp. range +23°C - +60°C)                      (According EN 1770)

**Thermal Stability**                      Glass transition temperature (TG):  
   HDT = +49°C (7 days / +23°C)                      (According to EN12614)

## Mechanical / Physical Properties

<b>Compressive Strength</b>	~50 N/mm <sup>2</sup> (14 days, +23°C)	(According to EN 12190)
<b>Flexural Strength</b>	~20 N/mm <sup>2</sup> (14 days, +23°C)	(According to EN 196)
<b>Tensile Strength</b>	10 - 15 N/mm <sup>2</sup> (14 days, +23°C)	(According to DIN EN ISO 527-3)

### Bond Strength

Time	Substrate	Bond strength
After 3 days	Dry concrete	> 5 N/mm <sup>2</sup> *
After 3 days	Damp concrete	> 5 N/mm <sup>2</sup> *
After 3 days	Steel blast cleaned	> 10 N/mm <sup>2</sup>
After 3 days	Brick dry	> 1.5 N/mm <sup>2</sup> **

\*100% concrete failure

\*\*100% brick failure

## System Information

### Application Details

<b>Substrate Quality</b>	Mortar and concrete must be older than 28 days. Adequate substrate strength (concrete, masonry, natural stone) must always be confirmed.
--------------------------	---

### Application Conditions / Limitations

<b>Substrate Temperature</b>	+10°C min. / +35°C max.
<b>Ambient Temperature</b>	+10°C min. / +35°C max.
<b>Substrate Moisture Content</b>	Substrate must be dry or mat damp (no standing water)
<b>Relative Air Humidity</b>	85% max. (at +25°C)
<b>Dew Point</b>	Avoid condensation during dew point conditions. Substrate temperature during application must be at least 3°C above dew point.


## Application Instructions

### Mixing


Part A : part B = 1 : 1 by volume

### Mixing Tools


Getting the cartridge ready




Unscrew and remove the cap



Pull out the plug



Screw on the static mixer




Place the cartridge into the gun and start application

#### Important note:


When the work is interrupted the static mixer can remain on the cartridge after the gun pressure has been relieved. If the resin has hardened in the nozzle when work is resumed, a new nozzle must be attached.

**Application Method / Tools**


*General Advice*

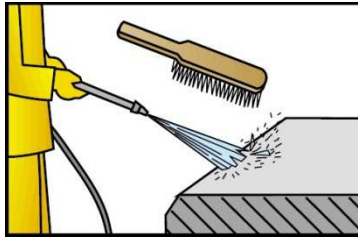


Clean the substrate (free from oil, grease and dust, no loose or friable particles, no cement laitance).

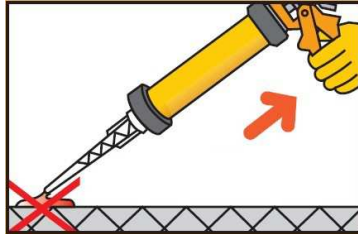

Pump approx. twice until both components start to come out uniformly. Do not use this material. Release the gun pressure and clean the end of the nozzle with a cloth.

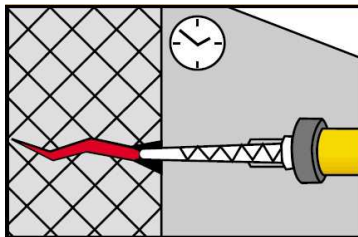

Apply the adhesive. Observe the open time.

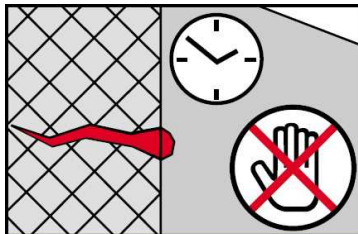

During curing / hardening the fixing must not be moved. Observe the curing time. Wash tools immediately with Sika® Thinner C. Wash hands and skin thoroughly with warm soap water afterwards.

Concrete, natural stone, cement mortar and render:

Clean, free from oils and grease, no loose or friable particles, no cement laitance.

Age of concrete 3 to 6 weeks (dependent on mix design and environment).

Preparation: Blast cleaning or grinding.

Construction steel 37, V2 A steel:

Free from oil, grease, rust or mill scale. Preparation: Blast cleaning or grinding.

Avoid dew point conditions. If prepared steel is not to be used immediately, its surface must be coated with Sikagard®-62 to protect it.

Polyester, epoxy, ceramics:

Free from oils and grease. Polyester epoxy: Grind, using coarse abrasive.

Glass, ceramics: Grinding, do not apply to siliconised substrates.

**Cleaning of Tools**

Clean all tools and application equipment with Sika® Thinner C immediately after use. Hardened / curded material can only be mechanically removed.

**Potlife**

60 minutes (+23°C)

**Notes on Application / Limitations**

Sikadur® resins are formulated to have low creep under permanent loading. However due to the creep behaviour of all polymer materials under load, the long term structural design load must account for creep. Generally the long term structural design load must be lower than 20-25% of the failure load. Please consult a structural engineer for load calculations for your specific application.

**Value Base** All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

**Local Restrictions** Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

**Health and Safety Information** For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Material Safety Data Sheet containing physical, ecological, toxicological and other safety-related data.

**Legal Notes** The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.



**SIKA LIMITED**

Head Office · Watchmead · Welwyn Garden City · Hertfordshire · AL7 1BQ · United Kingdom  
Phone: +44 1 707 394444 · Fax: +44 1 707 329129 · [www.sika.co.uk](http://www.sika.co.uk)

